434 BLOCK

GSM Block Antenna

The Art.434 Block antenna can be used with any of the VIDEX range of GSM intercom modules:

- GSM4K PRO series (Art.4810).
- GSMVRK series (Art.150).
- Digital GSM (Art.4812, Art.4812R).
- Art.2270 GSM interface.

With its robust and compact design it can be mounted either internally or externally and can be used on a 2G, 3G or 4G network.

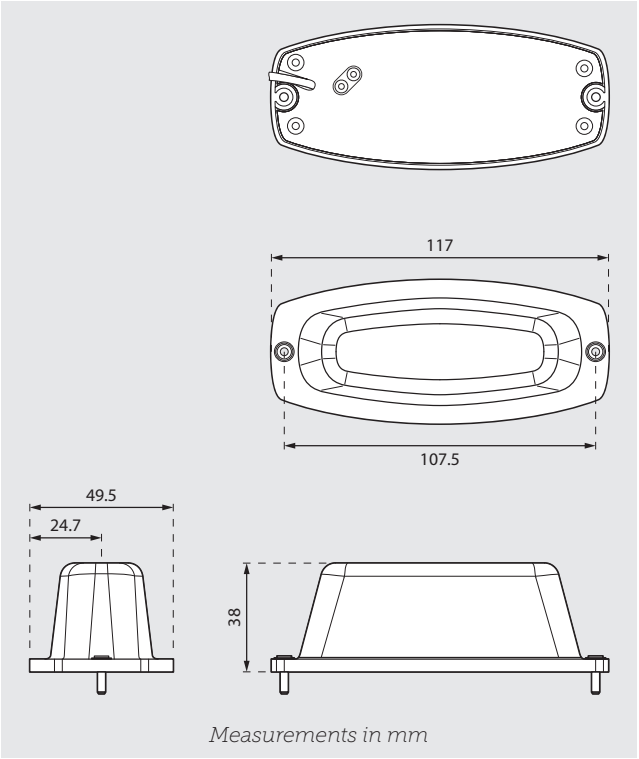

Measurements in mm

RF & Electrical Specification

Network Coverage	2G, 3G and 4G networks
Working Frequency	AMPS (824-894MHz), GSM (900MHz), DCS (1800MHz), PCS (1900MHz), 3G (2100MHz), WiFi (2400MHz), 4G/LTE (791-862/2500-2690MHz)
Gain	2 dBi (max.)
V.S.W.R. (Voltage Standing Wave Ratio)	< 2.5:1
Polarization	Linear
Impedance	50 Ohms

Data, Materials & Dimensions

Cable	RG174 coax cable
Cable Length	3m (approx.)
Connector	SMA male
Materials	Antenna Lid: ABS Antenna Base: metal
Colour	Black
Mounting	Internal or external use, surface mount
Dimensions (mm)	38 (H) x 117 (L) x 49.5 (W)

VIDEX SECURITY LTD.

Main UK Office
1 Osprey, Trinity Park, Trinity Way,
London, E4 8TD
tel: 0370 300 1240 - fax: 020 8523 5825

Northern UK Office
Unit 4-7 Chillingham Ind. Estate, Chapman Street,
Newcastle Upon Tyne, NE6 2XX
tel: 0370 300 1240 - fax: 0191 224 1559

www.videxuk.com

DS-434BLK-ENUK-V1-0 - 22/10/21

Although every effort has been made to provide accurate information, there may be technical or print errors in this data sheet. Videx reserves the right to make changes, corrections and improvements to such information at any time and without prior notice.