STANDARD PROXIMITY BRACKET


**MULTIPLE READERS, ONE SOLUTION.
THE UNIQUE DESIGN OF THE MULTI PROXIMITY WINDOW BRACKET FITS MOST COMMON PANEL MOUNT READERS AS STANDARD.**

SPECIAL TINTED COVER DECAL

One way insert so LED'S are visable without the need for holes or cut outs.

INDUSTRY STANDARD MOUNTING

Panel fixing studs at 48.5mm centres.

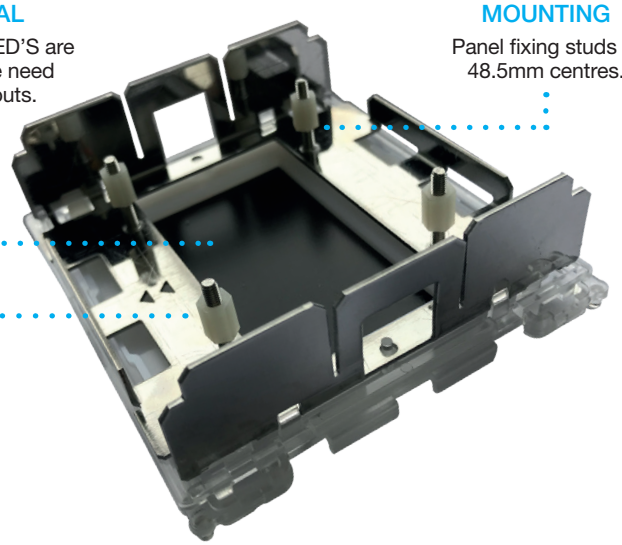

EASY TO USE HAND FIXINGS


No specialist tools required.



STANDARD VERSION

OPTION A

STANDARD PANEL MOUNT READER

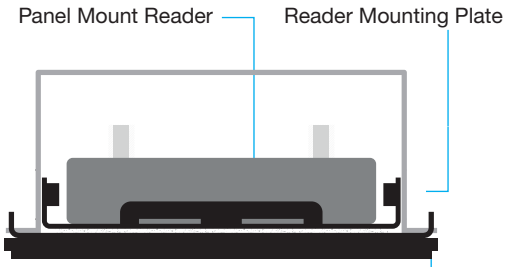


The Multi Bracket fitted with a panel mount reader

Front Window


OPTION B

USING THE MTMRFID OR MTMMDR READER

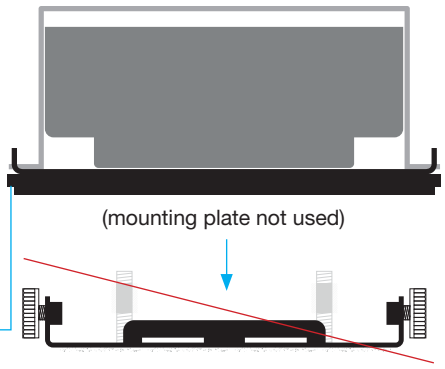

(mounting plate not used)

The multi proximity window bracket may also be suitable for use with any reader not listed but with the following dimensions:

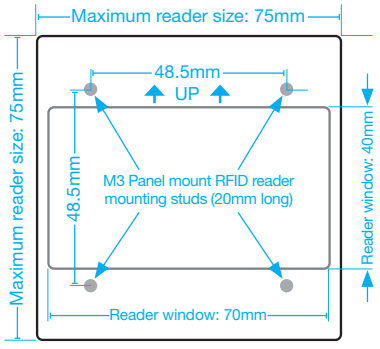

Maximum reader size: w75 x h75 x d30mm

Maximum reader window cutout: w70 x h40 mm

Reader mounting points: 48.5 x 48.5 mm

Reader mounting studs: M3 x 20 mm

COMPATIBLE READERS

Panel mount style readers

- Paxton proximity panel mount reader (390-135)
- Paxton proximity panel mount 125kHz reader (390-530)
- PAC OneProx GS3-LF Panel
- PAC OneProx GS3-HF Panel
- TDSi PANELgarde Panel mount reader
- ACTpro X 1030PM Panel mount reader
- ACTpro mifare 1030PM Panel mount proximity reader
- SRS DS14 UPR 125kHz
- AAProxPanel 125kHz EM Technology panel mount proximity reader
- BEWATOR / SIEMENS PM100
- KMS Simplekey HS Panel mount reader
- KMS SimpleKey legacy Panel mount reader
- Videcon Vprox
- Morley PanelProx 105048
- Securefast AEN1060WM Panel mount reader

CAME Readers

- MTMMDR
- MTMRFID

Wall mounted mullion readers

- HID ProxPoint Plus 6005
- Paxton P38 Prox Reader
- PAC Easykey Mullion – *NOTE: LED not visible*
- PAC DSI
- FDI Mullion
- FDI-020-006 Urmet
- Honeywell OmniProx OP10 Mini-mullion proximity reader